




K1320 EXTERNAL DOOR HARDWARE

Door Knocker

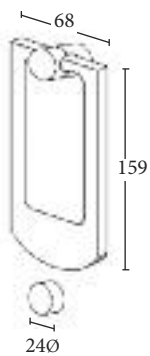

Beater

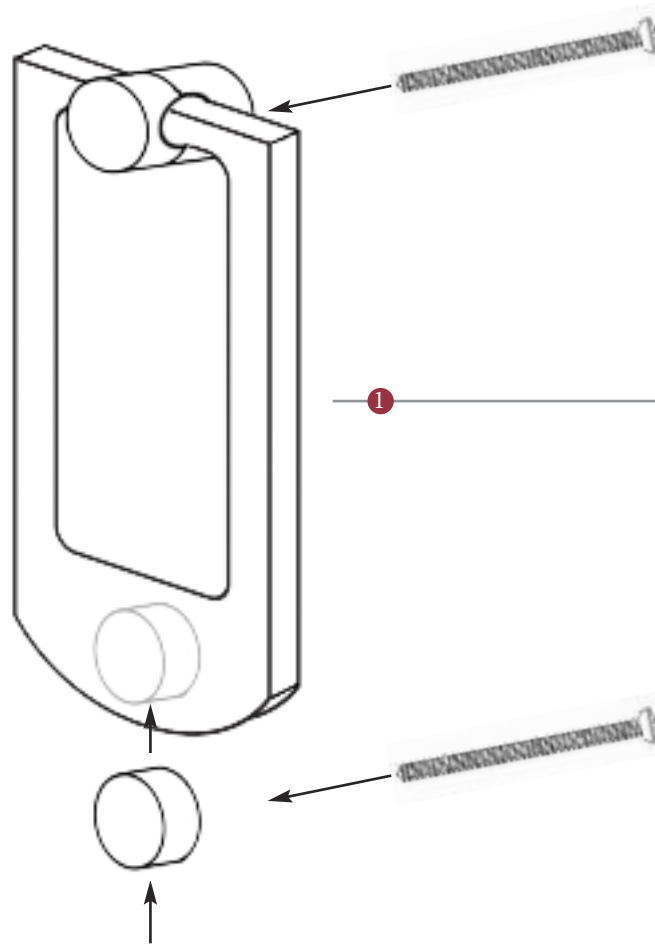

FITTING

- 1 Position Knocker assembly centrally on door and determine where to drill knocker fixing hole.
- 2 Drill a 5mm hole through the door.
- 3 Loosely fix Knocker and then determine position of Beater behind knocker as shown, from a position straight underneath that first position at approximately 13cm down.
- 4 Drill a 5mm hole through the door at that point.
- 5 Tighten all fixings and test.

Overview

① Door Knocker with Beater fixings illustrated

② (General Dimensions of Door Knocker and Beater)

③ Supplied with:
2x 50mm threaded back screw
2x 60mm threaded back screw

M Marcus Ltd., Dudley

Material	Date	Product Code	Description	Sizes shown are in mm and approximate. We reserve the right to amend where necessary and without any prior notice.
Solid Forged Brass	10 Sept 2019	K1320	Door Knocker	