


Vintage Range - Unlacquered Polished Brass (Project Finish)

45A Cooker Unit + 13A Socket - XUL.162.W

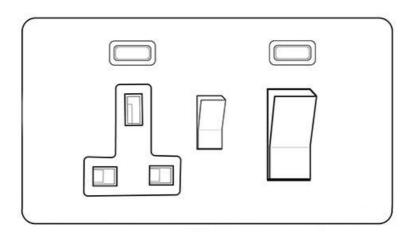

Product Product Insert Type 45A Cooker Unit + 13A Socket Unlacquered Polished Brass Switches & Sockets, XUL Insert Type 45A Cooker Unit + 13A Socket Unlacquered Polished Brass (Project Finish) White Body and Switch Trim White Height 48 mm Width Fixing Hole Centres Minimum Box Depth 48 Current 45 Amp Voltage 230 V Power Terminal Capacity 4 mm2 Earth Terminal Capacity Froduct Class 1 Face plate must be earthed Ambient Operating Temperature Fecommended Location Standard BS 4177, BS 1363		Mutana Danasa	
Insert Type 45A Cooker Unit + 13A Socket Plate Finish Unlacquered Polished Brass (Project Finish) White Body and Switch Trim White Height 88 mm Width 148 mm Fixing Hole Centres Box Fixing = 120.6 mm Minimum Box Depth 48 Current 45 Amp Voltage 230 V Power - Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Range	Vintage Range Unlacquered Polished Brass Switches &	
Plate Finish Switch Colour White Body and Switch Trim White Height 88 mm Width 148 mm Box Fixing Hole Centres Minimum Box Depth 48 Current Voltage 230 V Power Terminal Capacity Farth Terminal Capacity Product Class 1 Face plate must be earthed Ambient Operating Temperature Indoor use only	Product		
Switch Colour White Body and Switch Trim White Height 88 mm Width 148 mm Fixing Hole Centres Box Fixing = 120.6 mm Minimum Box Depth 48 Current 45 Amp Voltage 230 V Power - Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Insert Type	45A Cooker Unit + 13A Socket	
Body and Switch Trim White Height 88 mm Width 148 mm Fixing Hole Centres Box Fixing = 120.6 mm Minimum Box Depth 48 Current 45 Amp Voltage 230 V Power - Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Plate Finish	Unlacquered Polished Brass (Project Finish)	
Height 88 mm Width 148 mm Fixing Hole Centres Box Fixing = 120.6 mm Minimum Box Depth 48 Current 45 Amp Voltage 230 V Power - Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Switch Colour	White	
Width 148 mm Fixing Hole Centres Box Fixing = 120.6 mm Minimum Box Depth 48 Current 45 Amp Voltage 230 V Power - Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Body and Switch Trim	White	
Fixing Hole Centres Box Fixing = 120.6 mm Minimum Box Depth 48 Current 45 Amp Voltage 230 V Power - Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Height	88 mm	
Minimum Box Depth 48 Current 45 Amp Voltage 230 V Power - Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Width	148 mm	
Current 45 Amp Voltage 230 V Power - Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Fixing Hole Centres	Box Fixing = 120.6 mm	
Voltage 230 V Power - Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Minimum Box Depth	48	
Power - Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Current	45 Amp	
Terminal Capacity 4 mm2 Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Voltage	230 V	
Earth Terminal Capacity 5 mm2 Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Power	-	
Product Class 1 Face plate must be earthed Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Terminal Capacity	4 mm2	
Ambient Operating Temperature -5°C - 40°C Recommended Location Indoor use only	Earth Terminal Capacity	5 mm2	
Recommended Location Indoor use only	Product Class 1	Face plate must be earthed	
·	Ambient Operating Temperature	-5°C - 40°C	
Standard RS 4177 RS 1363	Recommended Location	Indoor use only	
Canada Bo IIII, Bo 1000	Standard	BS 4177, BS 1363	

All products listed conform to current British or European standards and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN 9001:2008 Quality System.	It is the policy of the company to continually improve products as part of our development program. Therefore, we respect the right to alter designs and dimensions without prior notice.	
Illustrations and diagrams are produced within the limitations of reproductions and printing processes are not binding.	Due to manufacturing process we cannot guarantee an exact colour match and shadings of certain finishes.	Correct as 31.08.2025. E&OE	



British Standards British Standards
The Heritage Brass Electrical
Collection is designed

Clection Standards
Collection Standards and manufactured to comply with the requirements of the relevant British Standards.





M. Marcus Ltd. Telephone: +44 (0)1384 247 845 Fax 01384 243 312 Email: electsales@m-marcus.com