

Panic 4RM **Pro** 4RM

PANIC LOCKS AND EXIT BAR



ISEO[®] iseo.com

Panic 4RM Pro 4RM

PANIC LOCKS AND EXIT BAR FOR ARMOURED DOORS





LOCKING SYSTEM WITH PANIC EXIT BAR COMPLIANT WITH EN1125 OR WITH INTERNAL HANDLES COMPLIANT WITH EN179 which present the typical dimensions for armoured doors.

ISEO panic/emergency locks can replace existing standard locks, while the panic exit bar with reduced dimensions allows to keep the existing fittings of each door.



1 x1R SMART PANIC 4RM MOTORIZED LOCKS

PANIC 4RM motorized locks have **standard dimensions 262x136x30 mm** and can fully replace an existing X1R.

They have integrated all the features and accessories of the x1R SMART family.



2 SERIE 600 PANIC 4RM MECHANICAL LOCKS

PANIC 4RM mechanical locks have the **same dimensions as the motorized 262x136x30 mm** and by using the same fastening holes they can replace the existing mechanical lock.

3 PRO 4RM PANIC EXIT BAR

PRO 4RM has reduced dimensions that allow to keep the existing door fittings, such as the internal cranksets or the external cylinder protectors.





REVERSIBLE AND ADJUSTABLE LATCH

PANIC 4RM mechanical and motorized locks have reversible and adjustable latches to adapt to the variable distances between the door and frame; these are useful for obtaining the best ratio between latch grip and maximum opening force. Furthermore, the latches are equipped with an anti-friction polymer ring for greater smoothness.



5 DURABILITY OF THE DOOR

The reversible strike plates have a bevelled edge on both sides to facilitate the sliding of the latch, which together with the latches with an anti-friction polymer ring, limit the wear of the door.



FUNCTIONING

From the inside: in compliance with the european standard EN1125, the latch and deadbolts are retracted by pressing the bar. In compliance with the european standard EN179, the latch and deadbolts are retracted by turning the handle.

From the outside: the key operates the deadbolts and retracts the latch.

RANGE

- A x1R SMART PANIC 4RM Motorized locks
- **B** Serie 600 PANIC 4RM Mechanical locks Morized and mechanical locks have the following characteristics:
 - case size 63 mm, backset 85 mm
 - bottom latch
 - piston centre distances 28 mm or 37 mm
 - protrusions 3 mm or 13 mm
- C PRO 4RM Panic exit bar (type A):
- painted black, white, metal grey, ENDUR4NCE;
- bars with lengths and finishes as per ISEO catalogue.







OPTIONAL ACCESSORIES

■ The use of the support plate art. 0000A00103 is recommended to strengthen the fastening of the panic exit bar with the lock.

The same 4 fixing holes of the standard lock are used.

■ Faceplates transform rim locks into mortice locks.





PRO 4RM has a wide selection of finishes, including **ENDUR4NCE**, which gives the product a strong metallic appearance and a very high resistance to corrosion (NSS neutral salt spray - up to 1,600 hours in compliance with EN1670). The bar is also supplied standard with the **Antigerm** treatment for permanent bacterial protection.



PANIC 4RM and PRO 4RM are suitable for


FIRE-RESISTANT

fire-resistant armoured doors.





DRAWINGS AND DIMENSIONS

Panic 4RM - Motorized and panic lock for armoured doors

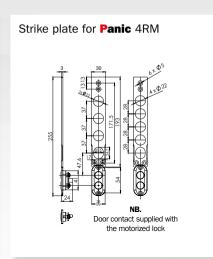


Panic 4RM - Mechanical and panic lock for armoured doors

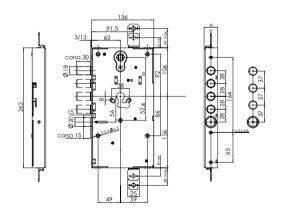

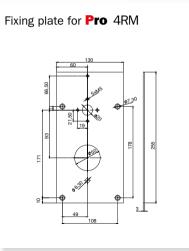


Pro 4RM - Panic exit bar for armoured doors

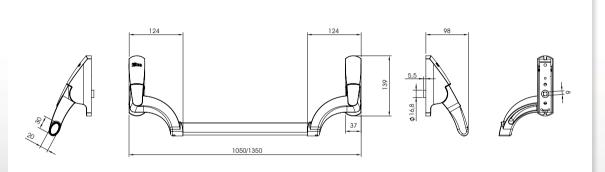

STANDARDS

EN12209, EN14846, EN1670.

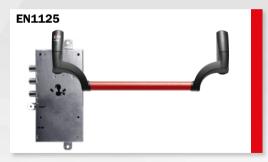



ISEO does not supply the handles, but describes in the product certification which models have been used to obtain to certify the kit

	obtain to certify the kit.					
	DESCRIPTION		PROTRU- SION	CENTRE DISTANCE	PACK	CODES
	x1R SMART PANIC 4RM Motorized and panic lock for armoured doors	4 1 11 11	3	28	1	00069H0328050
		4 deadbolts	13			00069H1328050
		3 deadbolts	3	37		00069Н0337050
			13			00069H1337050
	SERIE 600 PANIC 4RM Mechanical and panic lock for armoured doors	4 deadbolts	3	28		00069H0328M00
			13	20	1	00069H1328M00
		3 deadbolts	3	37		00069H0337M00
			13	O,		00069H1337M00
	PRO 4RM Panic exit bar for armoured doors	Painted BLACK			1	94H0000504S8
		ENDUR4NCE finish				94H0000R04S8
		Painted WHITE				94H0000404S8
		Painted M	ETAL GREY	,		94H0000704S8
	Fixing plate for PRO 4RM exit bar				10	0000A00103
	Faceplate for motorized PANIC 4RM	4 deadbolts		28	1	10400069H2800
		3 deadbolts		37		10400069H3700
	Faceplate for mechanical PANIC 4RM	4 deadbolts		28	5	10400069M2800
		3 deadbolts		37		10400069M3700
\$ 0000000 \$ 000000000000000000000000000	Strike plate for PANIC 4RM	4 deadbolts		28	5	20000069H028N
		3 deadbolts		37		20000069H037N

Together with the new accessories in the above table, the panic kit compliant with EN 1125/179 is completed with the following accessories from the ISEO catalogue: diverters code 1220500 - 1230000, rods code 99990015, strike plate for diverters code 200000122000, bar for panic exit bar Series 9459 *.





Iseo Serrature s.p.a. Via San Girolamo 13 25055 Pisogne (BS) Italy Tel. + 39 0364 8821 iseo@iseo.com