


Heritage Brass

Vintage Range - Matt Bronze

3 Gang Dimmer 400 watts (Compatible with halogen/ incandescent bulbs) - X09.280.400

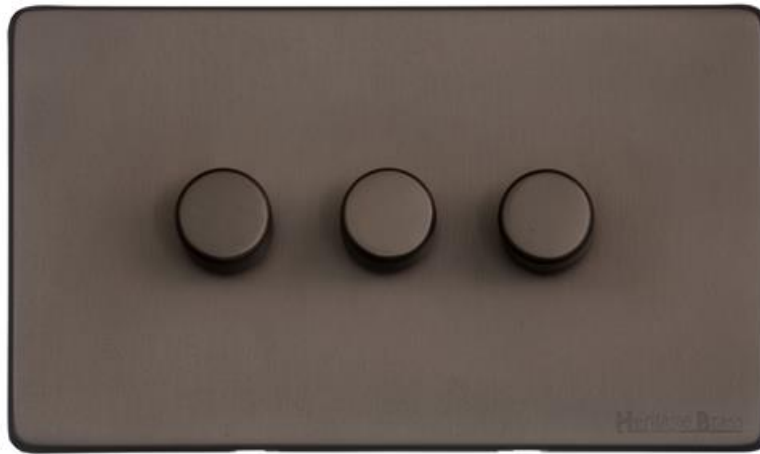

| | |
|--------------------------------------|---|
| Range | Vintage Range |
| Product | Vintage Range Matt Bronze Switches & Sockets, X09 |
| Insert Type | 3 Gang Dimmer 400 watts (Compatible with halogen/ incandescent bulbs) |
| Plate Finish | Matt Bronze |
| Switch Colour | Matt Bronze |
| Body and Switch Trim | - |
| Height | 88 mm |
| Width | 148 mm |
| Fixing Hole Centres | Box Fixing = 120.6 mm |
| Minimum Box Depth | 35 |
| Current | - |
| Voltage | 230 V |
| Power | 60 W - 400 W Leading Edge |
| Terminal Capacity | 4 mm ² |
| Earth Terminal Capacity | 5 mm ² |
| Product Class 1 | Face plate must be earthed |
| Ambient Operating Temperature | -5°C - 40°C |
| Recommended Location | Indoor use only |
| Standard | BS EN 55014, BS EN 60669-2-1 |

| | | |
|--|--|---|
| All products listed conform to current British or European standards and the product information is correct at the time of going to press. | All accessories are manufactured under an accredited BS EN 9001:2008 Quality System. | It is the policy of the company to continually improve products as part of our development program. Therefore, we respect the right to alter designs and dimensions without prior notice. |
| Illustrations and diagrams are produced within the limitations of reproductions and printing processes are not binding. | Due to manufacturing process we cannot guarantee an exact colour match and shadings of certain finishes. | Correct as 26.04.2026. E&OE |



British Standards
The Heritage Brass Electrical Collection is designed and manufactured to comply with the requirements of the relevant British Standards.



M. Marcus Ltd.
Telephone: +44 (0)1384247845
Fax: 01384 243 312
Email: electsales@m-marcus.com
Website: www.m-marcus.com